



## Permanent split capacitor motor 5" (LAM 121 mm) Nema 42. For extraction and ventilation.

### Features


- \* Continuous air over
- \* Sealed ball bearing (-45°C to +150°C)
- \* Plastic cover for capacitor and connections (Except model VEX 440)
- \* Rotation counterclockwise leads end (CCWLE)
- \* Class B insulation
- \* Capacitor 250 or 370 VAC.
- \* 2 or 3 Speeds available (Except model VEX 440)
- \* UL recognized motors
- \* Leads length 2032 mm.
- \* Rigid base mounting (Except model VEX 440)

### Specifications

1 Speed 60 Cycles

Models	H.P.	R.P.M.	Volts.	Amps.	Cap. MFD	Shaft XN	Shell XL	Total C
VEX - 401	1/10	1075	115	1,90	3	65	114	219
VEX - 402	1/10	1075	208 - 230	0,85	3	65	114	219
VEX - 403	1/8	1075	115	2,40	4	65	121	226
VEX - 404	1/8	1075	208 - 230	1,00	4	65	121	226
VEX - 405	1/6	1075	115	2,80	5	65	121	226
VEX - 406	1/6	1075	208-230	1,12	5	65	121	226
VEX - 407	1/4	1075	115	3,80	7,5	65	133	238
VEX - 408	1/4	1075	208-230	1,81	7,5	65	133	238
VEX - 409	1/3	1075	115	4,80	7,5	65	146	251
VEX - 410	1/3	1075	208 - 230	1,98	7,5	65	146	251
VEX - 411	1/2	1075	115	6,50	10	65	158	263
VEX - 412	1/2	1075	208 - 230	3,10	10	65	158	263
VEX - 413	1/10	1625	115	1,74	3	65	114	219
VEX - 414	1/10	1625	208 - 230	0,68	3	65	114	219
VEX - 415	1/8	1625	115	1,52	5	65	114	219
VEX - 416	1/8	1625	208 - 230	0,73	5	65	114	219
VEX - 417	1/6	1625	115	2,40	5	65	114	219
VEX - 418	1/6	1625	208 - 230	1,20	5	65	114	219
VEX - 419	1/4	1625	115	2,60	5	65	121	226
VEX - 420	1/4	1625	208 - 230	1,30	5	65	121	226
VEX - 421	1/3	1625	115	3,80	7,5	65	127	232
VEX - 422	1/3	1625	208-230	1,90	7,5	65	127	232
VEX - 423	1/2	1625	115	5,20	7,5	65	133	238
VEX - 424	1/2	1625	208-230	2,60	7,5	65	133	238
VEX - 440	1/4	1625	115	3,40	10	58,5	113	170

### Plane

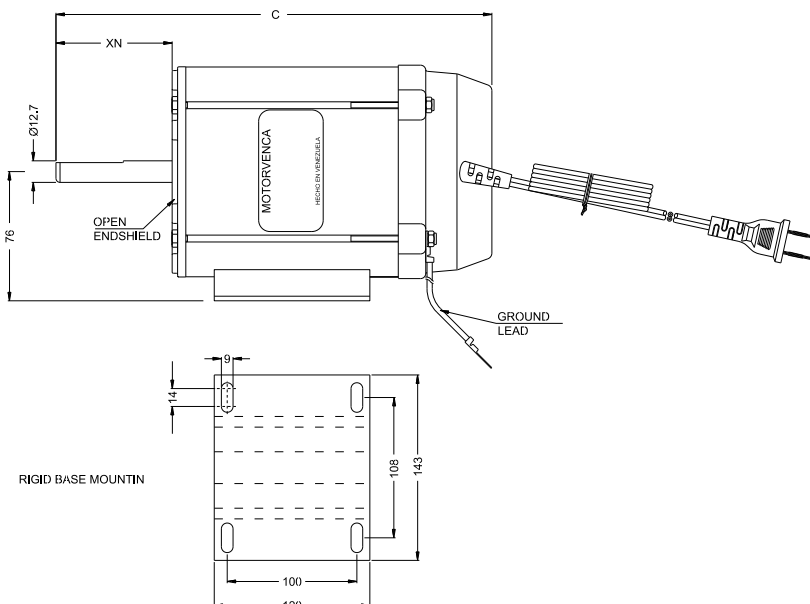

Modelo VEX440

